

General

- Capacities: 2.000 - 12.000 litres
- Line capacities: 10 - 70 tons/hour
- Mixing time: 3,5 up till max.
4 minutes
- Min. content: 25 % of the nominal
content
- Max. content: 100 % of the
nominal content
- Variation co-efficient: less than 5 %

Application area

The mixing of grinded raw materials
for the:

- animalfeedindustry
- fishfeedindustry
- petfoodindustry

Additives

The following products can be added:


- fat
- metheonine
- lysine
- oils
- max. 2 % molasses
- vinasse
- micro and macro ingredients
- vitamins
- medicines

Range of options

- Standard version composed of:
 - * U-shaped body
 - * ribbon holders clamped unto the
main shaft
 - * discharge slides
- Low residue, low contamination
version with:
 - * either U-shaped or "drop"-shaped
body
 - * special connection of ribbon
holder to main shaft
 - * special shaft sealing and bearing
 - * bomb door over entire length of
mixer
 - * transmission by means of motorre-
ductor or V-belt drive
- Loading and discharge bins




Horizontal ribbon mixer

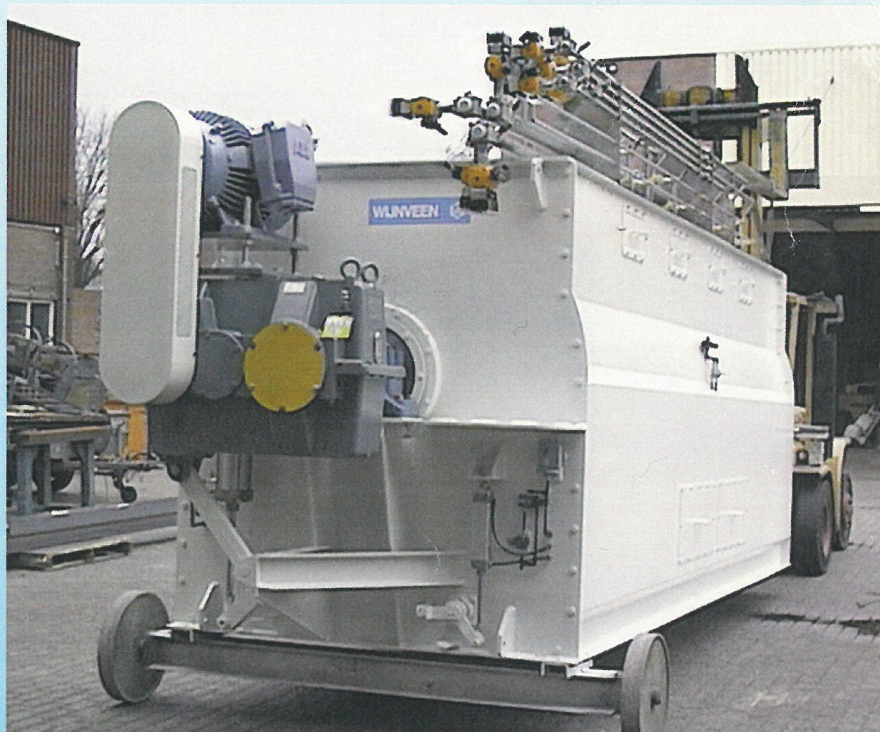

Mengen - Mischen - Mixing - Mélanger - Mezclar

Horizontal ribbon mixer

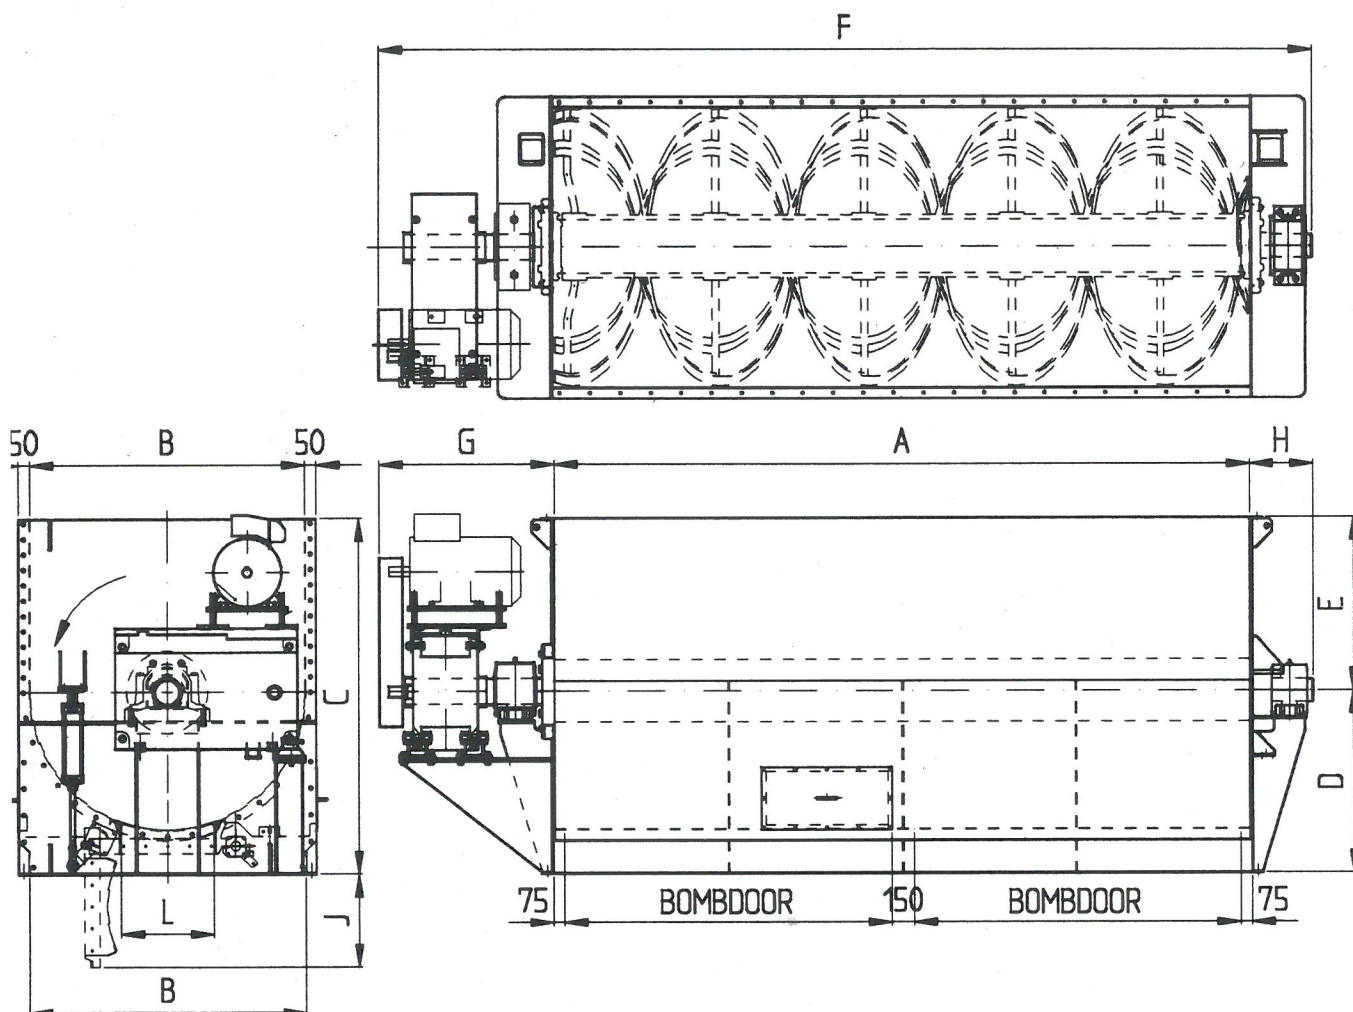

TYPE content (net litres)	content (gross litres)	A	B	C	D	E	F	G	H	J	L	weight exd. motor
1000	1250	1500	900	1370	750	620	2750	1000	250	470	400	2300 kg.
2000	2570	3000	900	1370	750	620	4260	1000	260	470	400	3200 kg.
4000	5020	3500	1180	1680	900	780	4760	1100	260	500	400	4000 kg.
6000	7440	3500	1480	2010	1040	970	4980	1200	380	620	500	4600 kg.
8000	10000	4600	1480	2010	1040	970	6180	1200	380	620	500	5500 kg.
10000	12400	4600	1640	2200	1110	1090	6210	1200	410	620	600	6300 kg.
12000	14900	5500	1640	2200	1110	1090	7110	1200	410	620	600	7000 kg.



Wijnveen Ede b.v.
Feed milling
Powder processing

Slijpkruikweg 50
6712 DL Ede - Holland
P.O. box 212 6710 BE Ede
Phone +31 (0)318 - 689292
Fax +31 (0)318 - 616970